

Important Instructions:

- Switch off the appliances, and plug out before Disassembly
- Take care PBAs components to avoid any electrostatic charge or physical damage during replacement

- 1** Switch off the appliances first
Plug-out the Main plug




- 2** Remove all screw and open the
back cover to open the panel



- 3** Remove the Display panel
connector from the main PBA

- 4** Open all 3 screws of coil

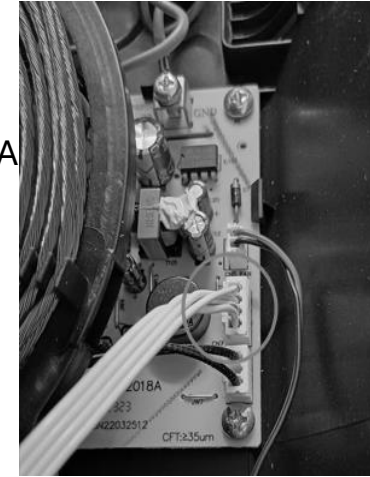

- 5** Open all 4 screws and
remove the connectors

- 6** Replace the Main PBA

